

Key Features

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Child-Safe Markings & Retail Packaging
- Wide operating temperature range (-20°C / +60°C)
- Low self-discharge with long operating life (<1% after 1 year of storage at +20°C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
 - Safety: IEC 60086-4
 - Transport: UN 38.3
 - REACH compliance
 - Quality: ISO 9001, Duracell World Class Continuous Program

Electrical characteristics

▪ Nominal capacity (15k Ohm Cont., 2.0 V cut-off)	165 mAh
▪ Nominal voltage (at +20 °C)	3.0 V
▪ Standard Continuous Discharge Current	0.2 mA
▪ Maximum Continuous Discharge Current	6 mA
▪ Maximum Pulse Discharge Current at 1 sec	20 mA
▪ Nominal Energy	495 mWh
▪ AC Impedance @ 1kHz	24 Ohm

Physical characteristics

▪ Typical weight	2.56 g (.09 oz.)
▪ Li metal content	approx. 0.052 g

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


Typical applications

- Medical devices
- Security devices
- Fitness devices
- Watches
- Calculators
- Wireless sensors
- Toys
- Key-Fobs & Trackers


Operating conditions

- Operating temperature range -20°C to 60°C (-4°F to 140°F)
- Storage temperatures Recommended 5°C to 30°C (41°F to 86°F)

Rated Capacity
15K Ohm Continuous to 2.0V

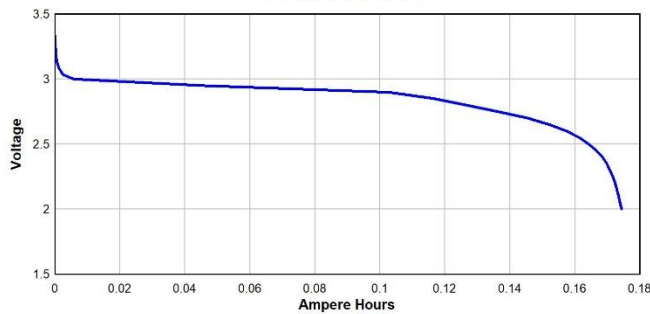


IEC Key Fob Performance
10 mA 5s/m, 24hd to 1.8V

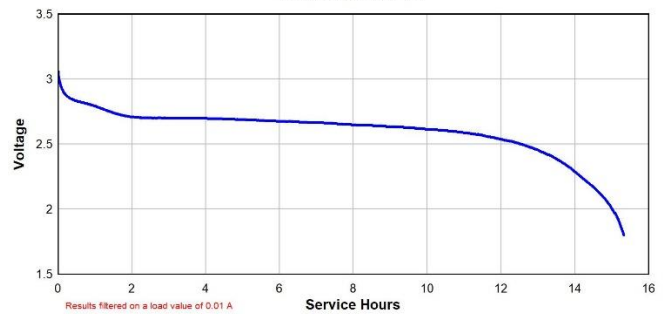

Continuous Discharge
Multiple Loads



Temperature Discharge
15K Ohm Continuous to 2.0V

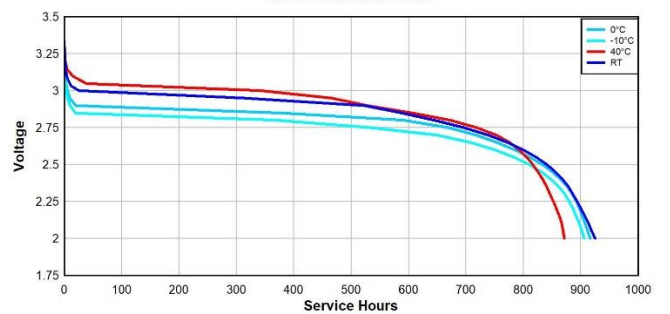

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

60086-4 © IEC:2007 Edition 3.0

Test	Test designation	Observation
A	Altitude	Pass
B	Thermal cycling	Pass
C	Vibration	Pass
D	Shock	Pass
E	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
H	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

Storage

The storage area should be clean, cool (preferably not exceeding +30 °C), dry and ventilated

Warning

Fire, explosion and burn hazard
Do not recharge, short circuit, crush, disassemble, heat above 100 °C (212 °F), incinerate, or expose contents to water

Warning! Keep batteries away from children!

Always keep your batteries away from children to prevent swallowing. If ingestion does occur, however, be aware that initial symptoms may be similar to other childhood illnesses such as coughing, drooling and discomfort.

Battery ingestion hotline (1-800-498-8666)

Cavity Contact Design Recommendation

Duracell implemented on-cell Child Secure Technology to protect against accidental lithium coin battery ingestion. Non-toxic, bitter coating on the battery that is designed to compel those who put battery in their mouth to immediately spit the battery out. Duracell recommends device designers and manufacturers avoid placing contacts within 3.2 mm of the perimeter of the negative terminal as shown in Figure 1.

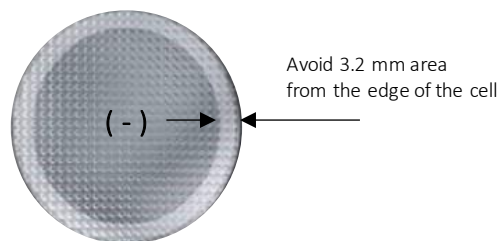


Figure 1

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454

www.duracell.com