# DURACELL®


# M-SOLAR PANEL


**USER MANUAL** 



# **INCLUDED IN THE PACKAGE**

# 1. FOLDABLE SOLAR PANEL 36W








2. USB-C to USB-C Cable



4. CARABINER BUCKLES



# **DETAILS**

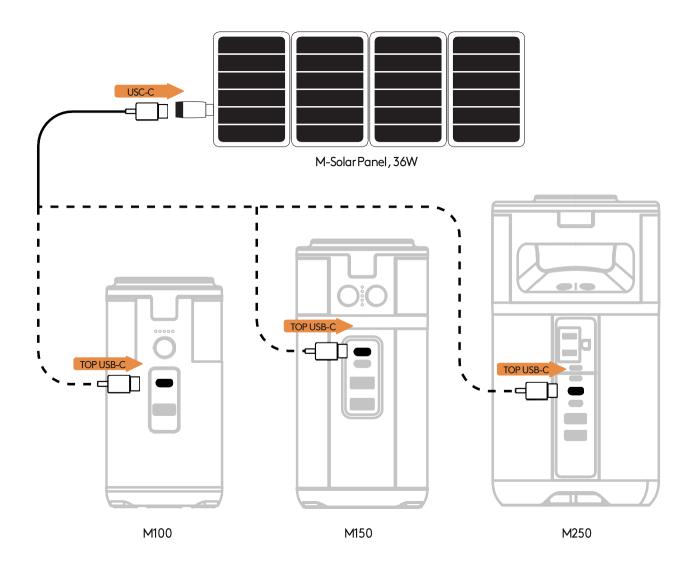

#### CARE AND MAINTENANCE

- To clean, use a damp cloth to gently wipe the surface. Do not use any chemicals or corrosive products. Do not immerse in water. A soft brush can be used to remove any loose dirt.
- Do not drop or bend.
- Do not immerse in water or any other liquid.
- Do not use or store near fire or heat sources.
- Do not disassemble.
- Do not connect more than 2 solar panels in series or parallel connections.











### FREQUENTLY ASKED QUESTIONS

 Which Portable Power Stations are compatible with my M-Solar Panel?
 The Duracell M-Solar Panel is compatible with all M-Series Portable Charging Hubs. USB-C to USB-C cable (included) can be used.



- 2. How do I get the most power out of my M-Solar Panel?
  For best results, use it on bright, sunny days with a clear sky. Continuously realign your solar panel so that it is pointing directly at the sun. Keep the solar panel's surface clean. Avoid scratches on the solar panel surface.
- 3. Is my M-Solar Panel waterproof?
  The M-Solar Panel can withstand water splashes and light rain when set up with the cell surface up. Backside fabrics are not waterproof and contact with water should be avoided. Do not leave your solar panel in the rain. Do not immerse your solar panel in water.

For more information regarding our product line, customer service and warranty information please contact Duracell Consumer Relations at 800-551-2355 or visit our website: **duracell.com** 

### WARRANTY INFORMATION

Duracell offers a 24-month limited warranty from the date of purchase. Keep a copy of your receipt as proof of purchase. Our product's warranty is limited only to the unit itself when used normally in accordance with the operating instructions and the system environment. Therefore, the customer acknowledges and agrees that:

- Duracell is not liable for damage or loss resulting from the use of this product or for any claim from a third party.
- Duracell is not liable for problems with any electronic devices or home appliances or any other
  hardware arising from the use of this product, the suitability of the product for specific hardware,
  software, or peripherals, operating conflicts with other installed software, data loss, or other
  accidental or unavoidable damages.
- Duracell is not liable for financial damages, lost profits, claims from third parties, etc., arising from the use of this product.

### **SPECIFICATIONS**

MODEL	GSC-36W
Rated Power	36W
Cell Efficiency	≥22%
Max Power Voltage	14.2V
Max Power Current	2.5A
Open Circuit Voltage	17.16V
Short Circuit Current	2.7A
Operating Temperature Range	-10°C to 65 °C (14°F to 149 °F)

All technical data at standard test conditions: AM=1.5, E=1000W/m², Tc=25 °C at 200ms exposure of Flash Test, with fresh product.